

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050940 A1

- (51) International Patent Classification⁷: **H04L 27/26**
- (21) International Application Number:
PCT/SE2003/001811
- (22) International Filing Date:
24 November 2003 (24.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (publ)** [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LIEBACK, Tomas** [SE/SE]; Råda Portar 97, S-435 32 Mölnlycke (SE). **HAGEN, Derek** [NL/SE]; Björcksgatan 34b, S-416 52 Göteborg (SE).
- (74) Agent: **ALBIHNS GÖTEBORG AB**; Box 142, S-401 22 Göteborg (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FREQUENCY SHIFTING OF WCDMA CARRIERS FOR VARIABLE CARRIER SEPARATION

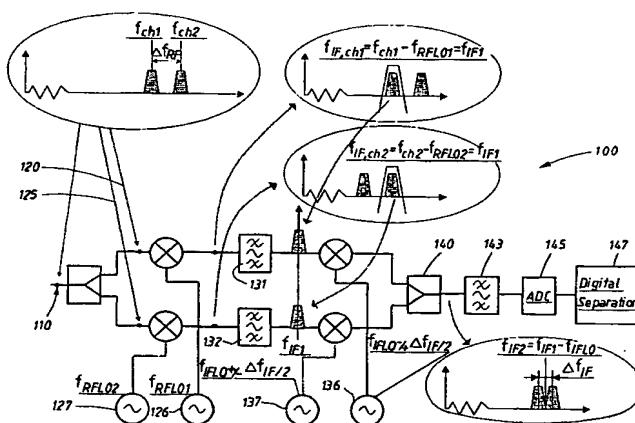

(57) Abstract: The invention relates to a method and a device for processing an electromagnetic signal comprising first and second carriers at first and second carrier frequencies. The method comprises splitting the signal into first and second branches, a first shifting of the frequency of the signal in each of the branches by respective first frequency shifts, and filtering the signal in the first and the second branch in respective first filters. In addition, there is a second shifting of the frequency in each of the branches by respective second frequency shifts, and a first frequency distance between the first frequency shifts, such that after the first shift, the first carrier in the first branch has essentially the same center frequency as the second carrier in the second branch. The first filters have the same filter characteristics, so that the signal in each branch after the first filter comprises only one of said first or second carrier wave, but at the same center frequency.